

All Quadra VPU Products

Smart VPU | Codensity Quadra G5

	2nd Generation Smart VPUs			
	Server	Modules		
	G5 Smart VPU Quadra	Smart VPU T1U	Smart VPU T1A	Smart VPU T2A
Performance				
ASIC Codensity chip	G5, T1Us (10x)	G5	G5	G5 (2x)
Price	starting at \$19,000	\$1,500	\$1,500	\$2,750
Form Factor	1RU Server	U.2	AIC, HHHL	AIC, HHHL
Power Consumption	~500W	17W	20W	40W
Real-time Throughput Up to:	320x 1080p30 80x 4Kp30 20x 8Kp30	32x 1080p30 8x 4Kp30 2x 8Kp30	32x 1080p30 8x 4Kp30 2x 8Kp30	64x 1080p30 16x 4Kp30 4x 8Kp30
Latency	8 ms	8 ms	8 ms	8 ms
Encode Codecs	H.264, HEVC, JPEG, YUV, AV1			
Decode Codecs	H.264, HEVC, JPEG, YUV, VP9			
Audio Codecs	MP3, AAC-LC, HE-AAC			
Features				
Artificial Intelligence	150 TOPS	15 TOPS	18 TOPS	36 TOPS
New Capped CRF	●	●	●	●
Flexible GOP	●	●	●	●
Scaling	●	●	●	●
Cropping and Padding	●	●	●	●
Video Overlay	●	●	●	●
YUV / RGB Conversion	●	●	●	●
Configurable tuning of quality/throughput	●	●	●	●

● Feature supported on VPU ○ Feature runs on host CPU



NETINT Technologies
www.netint.com
sales@netint.com

Quadra Video Server

Smart VPU | Codensity Quadra G5




NETINT Technologies
www.netint.com
sales@netint.com

CPU Options	AMD EPYC™ 7232P Server Processor (8-core)
	AMD EPYC 7543P Server Processor (32-core)
	AMD EPYC 7713P Server Processor (64-core)
Operating System	Ubuntu 20.04.05 LTS <i>(as of May 2023)</i>
Memory	8x 16GB DDR4-3200
Storage	400GB M.2 SSD
NVMe Support	10x
PCIe Expansion	Up to 3x PCIe slots
Network Options	Dual 10GBase-T LAN
Power Consumption	~500W
Power Supply	700W: 100 - 140Vac
	750W: 200 - 240Vac
	750W: 200 - 240Vdc (CCC only)
Transcoders	10x NETINT Quadra T1U
Encoding Capacity	Up to 20x 8Kp30, 80 4Kp30 or 320x 1080p30
Codec Support	H.264 - Encode/Decode
	HEVC - Encode/Decode
	JPG - Encode/Decode
	VP9 - Decode
	AV1 - Encode
Transcoder Software	FFmpeg, GStreamer

Physical Dimensions	W: 17.2" (437mm), H: 1.7" (43mm), D: 23.5" (597mm)
Rack Size	1U
Weight	39 lbs (17.69 kg) <i>(fully loaded with 10 T1Us)</i>
Environmental	50 degrees F to 95 degrees F Operating Temperature, 8% to 90% Operating Relative Humidity
Power Inputs	100 - 140Vac / 8 - 6V / 50-60Hz
	200 - 240Vac / 4.5 - 3.8A / 50-60Hz
	200 - 240Vdc / 4.5 - 3.8A (CCC Only)
Certifications	RoHS Compliant, UL Approved

Quadra T1U Smart VPU

AI powered Video Processing Unit | Codensity G5

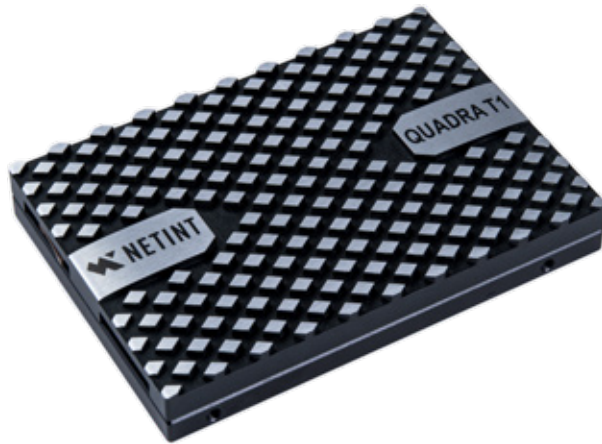

NETINT Technologies
www.netint.com
sales@netint.com

Form Factor	U.2
ASIC	1x Codensity G5
Interface	PCIe 4.0 x4
Power Consumption (Typ)	17W
Usage	24/7 Operation
Operation Temperature	0 - 50°C
RoHS Compliance	European Union (EU) ROHS Compliance Directives
Product Health Monitoring	Self-Monitoring, Analysis, and Reporting Technology (SMART) commands Temperature Monitoring and Logging
Video Encoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.264 Main, Main 10 JPG YUV 420 8 bit/10 bit encoding AV1 Main
Video Decoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.265 Main, Main 10 VP9 Profile 0, 2 JPEG YUV 420 8 bit/10 bit decoding
Throughput Capacity	Up to 32x 1080p30, 8x 4Kp30, 2x 8Kp30
Audio Codecs	MP3, AAC-LC, HE-AAC
Level	1 to 6.2 Main Tier
Resolution	32 x 32 to 8192 x 5120
Scan Type	Progressive
Bitrate	64kbit/s to 700Mbit/s
Software Integration	FFmpeg SDKs, LibXcoder API integration
AI Deep Neural Network Engines	15 TOPS AI Assisted Encoding
Region of Interest (ROI)	ROI enables the quality of some regions to be improved at the expense of other regions
Closed Captioning	EIA CEA-708 for H.264 and HEVC encode/decode
High Dynamic Range (HDR)	HDR10, HDR10+, HLG for H.264 & HEVC encode/decode
Low Latency	Sub-frame latency
IDR Insert	Forced IDR frame inserts at any location
Flexible GOP Structure	8 presets plus customizable GOP structure
Video 2D Processing Engine	Crop & Padding/Scaling/Overlay/YUV & RGB Conversion

Quadra T1A Smart VPU

AI powered Video Processing Unit | Codensity G5



NETINT Technologies
www.netint.com
sales@netint.com

Form Factor	AIC (HH HL)
ASIC	1x Codensity G5
Interface	PCIe 4.0 x4
Power Consumption (Typ)	20W
Usage	24/7 Operation
Operation Temperature	0 - 50°C
RoHS Compliance	European Union (EU) ROHS Compliance Directives
Product Health Monitoring	Self-Monitoring, Analysis, and Reporting Technology (SMART) commands Temperature Monitoring and Logging
Video Encoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.264 Main, Main 10 JPG YUV 420 8 bit/10 bit encoding AV1 Main
Video Decoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.265 Main, Main 10 VP9 Profile 0, 2 JPEG YUV 420 8 bit/10 bit decoding
Throughput Capacity	Up to 32x 1080p30, 8x 4Kp30, 2x 8Kp30
Audio Codecs	MP3, AAC-LC, HE-AAC
Level	1 to 6.2 Main Tier
Resolution	32 x 32 to 8192 x 5120
Scan Type	Progressive
Bitrate	64kbit/s to 700Mbit/s
Software Integration	FFmpeg SDKs, LibXcoder API integration
AI Deep Neural Network Engines	18 TOPS AI Assisted Encoding
Region of Interest (ROI)	ROI enables the quality of some regions to be improved at the expense of other regions
Closed Captioning	EIA CEA-708 for H.264 and HEVC encode/decode
High Dynamic Range (HDR)	HDR10, HDR10+, HLG for H.264 & HEVC encode/decode
Low Latency	Sub-frame latency
IDR Insert	Forced IDR frame inserts at any location
Flexible GOP Structure	8 presets plus customizable GOP structure
Video 2D Processing Engine	Crop & Padding/Scaling/Overlay/YUV & RGB Conversion

Quadra T2A Smart VPU

AI powered Video Processing Unit | Codensity G5



NETINT Technologies
www.netint.com
sales@netint.com

Form Factor	AIC (HH HL)
ASIC	2x Codensity G5
Interface	PCIe 4.0 x4
Power Consumption (Typ)	40W
Usage	24/7 Operation
Operation Temperature	0 - 50°C
RoHS Compliance	European Union (EU) ROHS Compliance Directives
Product Health Monitoring	Self-Monitoring, Analysis, and Reporting Technology (SMART) commands Temperature Monitoring and Logging
Video Encoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.264 Main, Main 10 JPG YUV 420 8 bit/10 bit encoding AV1 Main
Video Decoding Standards/Formats	AVC/H.264 Baseline, Main, High, High 10 HEVC/H.265 Main, Main 10 VP9 Profile 0, 2 JPEG YUV 420 8 bit/10 bit decoding
Throughput Capacity	Up to 64x 1080p30, 16x 4Kp30, 4x 8Kp30
Audio Codecs	MP3, AAC-LC, HE-AAC
Level	1 to 6.2 Main Tier
Resolution	32 x 32 to 8192 x 5120
Scan Type	Progressive
Bitrate	64kbit/s to 700Mbit/s
Software Integration	FFmpeg SDKs, LibXcoder API integration
AI Deep Neural Network Engines	36 TOPS AI Assisted Encoding
Region of Interest (ROI)	ROI enables the quality of some regions to be improved at the expense of other regions
Closed Captioning	EIA CEA-708 for H.264 and HEVC encode/decode
High Dynamic Range (HDR)	HDR10, HDR10+, HLG for H.264 & HEVC encode/decode
Low Latency	Sub-frame latency
IDR Insert	Forced IDR frame inserts at any location
Flexible GOP Structure	8 presets plus customizable GOP structure
Video 2D Processing Engine	Crop & Padding/Scaling/Overlay/YUV & RGB Conversion